



(19)

(11) Publication number: **01217921 A**

Generated Document.

PATENT ABSTRACTS OF JAPAN(21) Application number: **63042351**(51) Intl. Cl.: **H01L 21/302**(22) Application date: **26.02.88**


<p>(30) Priority:</p> <p>(43) Date of application publication: 31.08.89</p> <p>(84) Designated contracting states:</p>	<p>(71) Applicant: NIPPON TELEGR & TELEPH CORP <NTT></p> <p>(72) Inventor: URISU TSUNEO UCHIUMI YUICHI TAKAHASHI JUNICHI</p> <p>(74) Representative:</p>
---	---

(54) ETCHING METHOD

(57) Abstract:

PURPOSE: To accurately miniaturize by mounting an etching mask on a substrate, supplying etching reaction gas, and irradiating the surface of the substrate with soft X-rays or vacuum ultraviolet rays, thereby etching the irradiated part of the substrate.

CONSTITUTION: An optical system 3 for introducing a radiated light L of soft X-rays or vacuum ultraviolet rays from an electron synchrotron light radiating device 1 into a reaction chamber 4 is composed of two planar reflection mirrors 3A, 3B. The material of a substrate 6 to be etched with the light L is made of SiO₂, Si₃N₄ or polysilicon added in high concentration with phosphorus or boron. Etching reaction gas G includes small amount of oxygen to be added fluorine and chlorine series etching gas such as SF₆, CF₄, SiF₄, CCl₄, Cl₂, XeF₂, etc. Thus, since the etching for a thin filmlike etching mask 7 made of a material of semiconductor of Si, Ge or metal and their polycrystal scarcely advances even under the irradiation of reaction gas, microminiaturization of 0.1 μm or less can be performed.

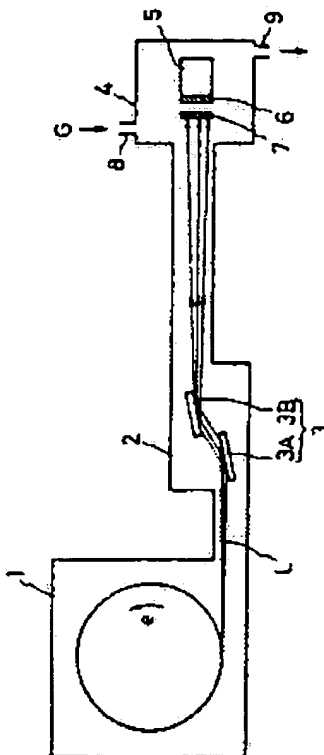

BEST AVAILABLE COPY

COPYRIGHT: (C)1989,JPO&Japio